

# MOS INTEGRATED CIRCUIT

## TONE GENERATOR

- 12 TONE OUTPUTS TTL COMPATIBLE
- HIGH ACCURACY OF OUTPUT FREQUENCIES: ERROR LESS THAN  $\pm 0.069\%$
- LOW IMPEDANCE PUSH-PULL OUTPUTS
- LOW POWER DISSIPATION:  $< 400 \text{ mW}$
- INPUT PROTECTED AGAINST STATIC CHARGES
- LOW INTERMODULATION

The M 087 is a monolithic tone generator specifically designed for electronic organs. Constructed on a single chip using low threshold P-channel silicon gate technology it is supplied in a 16-lead dual in-line plastic package.

## ABSOLUTE MAXIMUM RATINGS


$V_{GG}^*$	Source supply voltage	-20 to 0.3	V
$V_I^*$	Input voltage	-20 to 0.3	V
$I_o$	Output current (at any pin)	3	mA
$T_{stg}$	Storage temperature	-65 to 150	°C
$T_{op}$	Operating temperature	0 to 70	°C

\* This voltage is referred to  $V_{SS}$  pin voltage

ORDERING NUMBER: M 087 B1 for dual in-line plastic package


## MECHANICAL DATA

Dimensions in mm

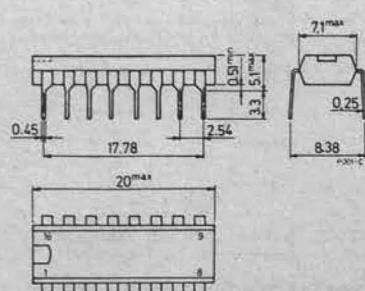


# M 087

## CONNECTION DIAGRAM

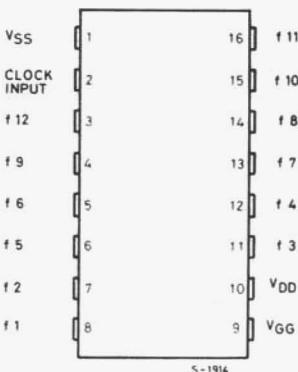

S-1914

## BLOCK DIAGRAM

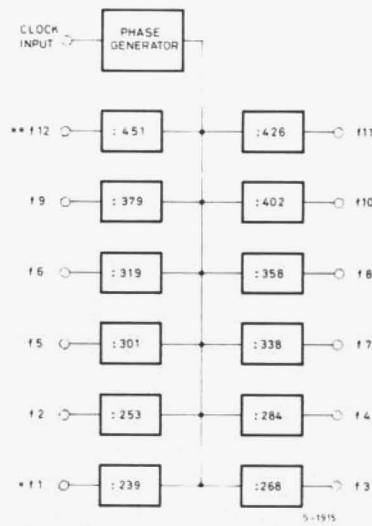

S-1915

\* f<sub>1</sub> is the highest output frequency and its musical equivalent is : C

\*\* f<sub>12</sub> is the lowest output frequency and its musical equivalent is: C #

**STATIC ELECTRICAL CHARACTERISTICS** (positive logic,  $V_{GG} = V_{SS}$  -16.15 to -18.75V,  $V_{DD} = V_{SS}$ -9 to -10V,  $V_{SS} = 4.75$  to 5.25V,  $T_{amb} = 0$  to 70°C unless otherwise specified)

Parameter	Test conditions	Min.	Typ.	Max.	Unit
<b>CLOCK INPUT</b>					
$V_{IH}$ Clock high voltage		$V_{SS}-0.5$	$V_{SS}$		V
$V_{IL}$ Clock low voltage		$V_{SS}-6$	$V_{SS}-4.5$		V
<b>DATA OUTPUTS</b>					
$V_{OL}$ Output low voltage	$I_L = 0$ mA	$V_{DD}$			V
$V_{OH}$ Output high voltage	$I_L = 1$ mA	$V_{SS}-0.5$	$V_{SS}$		V
$I_{LO}$ Output leakage current	$V_O = V_{SS}-10$ V $T_{amb} = 25^\circ\text{C}$			10	$\mu\text{A}$
<b>POWER DISSIPATION</b>					
$I_{GG}$ Supply current	$T_{amb} = 25^\circ\text{C}$		11	13	mA
$I_{DD}$ Supply current	$T_{amb} = 25^\circ\text{C}$		13	16	mA

**DYNAMIC ELECTRICAL CHARACTERISTICS** (positive logic,  $V_{GG} = V_{SS}$  -16.15 to -18.75V,  $V_{DD} = V_{SS}$ -9 to -10V,  $V_{SS} = 4.75$  to 5.25V,  $T_{amb} = 0$  to 70°C unless otherwise specified)

Parameter	Test conditions	Min.	Typ.	Max.	Unit
<b>CLOCK INPUT</b>					
$f$ Clock repetition rate		15	2000.24		kHz
$t_{pw}^*$ Pulse width (clock high)		170			ns
$t_{pw}^{**}$ Pulse width (clock low)	$f = 2000.24$ kHz	150			ns
<b>DATA OUTPUTS</b>					
$R_{DH}$ High level output dynamic impedance	$V_O = V_{SS}-0.5$ V		1		$k\Omega$
$R_{DL}$ Low level output dynamic impedance	$V_O = V_{DD}$		1		$k\Omega$

\* Measured at 90% of the swing.

\*\* Measured at 10% of the swing.

# M 087

## TYPICAL APPLICATION

