


OWNER'S MANUAL

DARKROOM TIMER DR-841

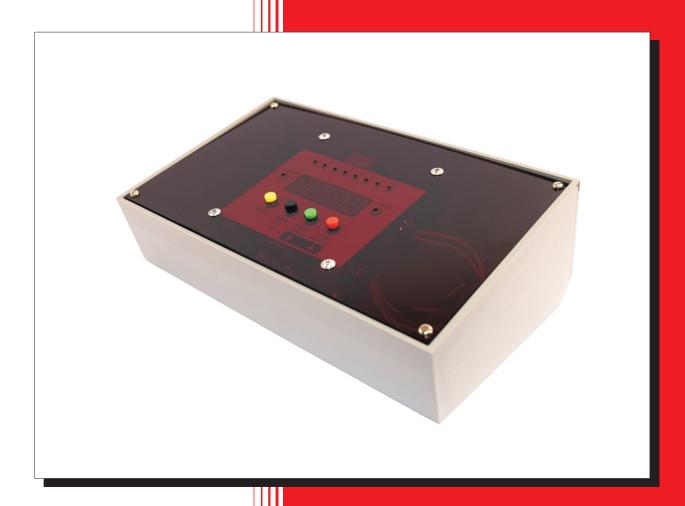

DR-841
Programmable
Darkroom Timer
with 8 memories

©2022 by Valter Narcisi www.narcisivalter.it

DARKROOM Timer DR-841

- Input Voltage: **12Vdc** (± 5%).
- Management with Microcontroller.
- Quartz accuracy.
- Count-Down Timer.
- Easy to use.
- 4 command buttons: TIME SELECT. PROG. START and STOP.
- 8 programmable Times from 0.1sec. to 10 minutes (9min. 59sec. 9dec.).
- Buzzer on-board for signalling counting end and for audio scanning of last 10 seconds.
- The time and setting are **stored** in the memory of chip and retrieved during Power ON.
- Red LED LOAD for showing the LOAD ON.
- Red LED PAUSE for showing the Timer is PAUSED.
- 8 Red LEDs to indicated the selected Time.
- 3A/250V Relay output and 3 way screw Terminal Block (NO Com NC).
- Can be activate enlarger LAMP up to 500 Watt.
- Displaying: 50x18 mm. Red Display 7-segment (0.59").
- Dimensions (mm.): 216 x 130 x 77.
- Tensione di alimentazione: 12Vcc (± 5%).
- Gestione a Microcontrollore.
- Precisione al Quarzo.
- Conteggio tipo 'Count-Down' (conto alla rovescia).
- Facile da utilizzare.
- 4 pulsanti di comando: SELEZIONE TEMPI, PROG, START e STOP.
- 8 tempi programmabili da 0.1sec. fino a 10 minuti (9min. 59sec. 9dec.).
- Presa Programmabile per pedale esterno (Funzione FOCUS oppure Avvio/Arresto del Timer).
- Buzzer on-board per segnalazione di fine conteggio e scansione audio degli ultimi 10 secondi.
- Tempi e impostazioni sono memorizzati nella **memoria** del chip e recuperati dopo l'accensione.
- LED rosso LAMP per visualizzazione stato ingranditore (Acceso o Spento).
- LED rosso PAUSA per visualizzazione del Timer in PAUSA.
- 8 LED rossi per l'indicazione del tempo selezionato dall'utente.
- Uscita relè: AC250V 3A su morsettiera a vite (NA Com NC).
- Attivazione di lampade fino a 500 Watt.
- Visualizzazione su **Display rosso** 50x18 mm. a 7-segmenti (0,59").
- Dimensioni (mm.): **216 x 130** x **77**.

USER's GUIDE for TIMER TIMER DR-841

INTRODUCTION

The **Timer DarkRoom DR-841 manage times from 0.1 SECONDs** up to **10 MINUTES** (9.59'9) and the values to be programmed are 0.1 SECOND steps.

After Power ON, the **Timer** displays the last time used by user: so, by pressing the **START** button, the relay is activated (RED **LED** is ON) and the Timer begins to count down. Alternatively, by pressing the **TIME SELECT** button, one of the 8 memorized times can be selected or, by pressing the **PROG** button, enters the TIME PROGRAMMING mode: the number of the time being programmed is indicated by one of the 8 small red LEDs (for example, if LED number 5 is on, it means that we are programming Time number 5).

If there is a **black out** (and a battery has not been connected), the Timer switches off completely (the relay deactivates): when the AC main is restored, the Timer displays the last time used by the user and it is ready to be activated again.


DEFAULT VALUES

When Power ON, the display always shows the last time used by the user (the lighting of one of the 8 **red LEDs** indicates which time is shown on the display). If the Timer never been used, the default values at first Power ON are automatically sets to "1.00'0" (factory default).

THE LEDS OF TIMER

In the **Timer DR-841** there are 10 LEDs:

- 8 RED LEDs The red LEDs turn on one at time and indicates the number of the Time shown in the Display.
- PAUSED LED The PAUSED LED is ON only when the Timer is paused...
- **ENLARGE LAMP LED** The ENLARGE LED is ON during the Timer is count-down (so, when the enlarger lamp is ON).

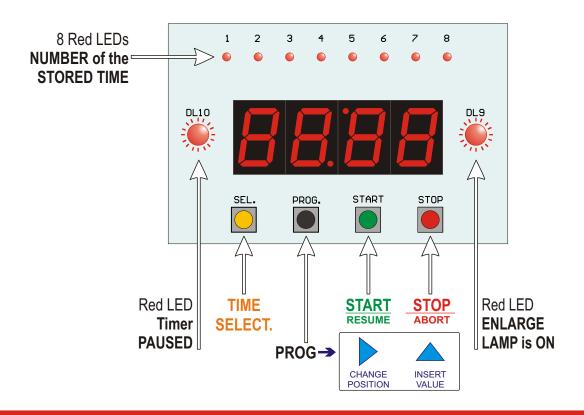

The COMMANDS BUTTON

SELECT the TIME

Before start the Timer, select (if necessary) the desidered time by press one ore more time the **TIME SELECT** button.



Each time the button is pressed, ONE of the 8 times programmed by the user will be shown on the display (the corresponding number will be indicated by ONE of the **8 red LEDs**).



Once you have reached time number 8, by pressing the button again, you start again from time number 1 and so on. The time currently shown on the display and indicated by the corresponding **red LED** lighting up, will be the one used by the Timer at start-up (in the example on the right, Time number 4 has been selected).




START / RESUME

This is the button for star the Timer. When the **START** button is pressed, the Timer activates the enlarger lamp and starts the countdown (starting from the time shown on the display).



During the countdown, the **red LED "LAMP"** is on, indicating that the enlarger lamp is activated.

Furthermore, the two separator dots on the display flash at a frequency 1 Hz (low separator dot for minutes/seconds) and 10 Hz (high separator dot for seconds/tenths).



STOP / ABORT

This button, pressed once during the countdown, momentarily stops the Timer and turns off the enlarger lamp (the **red LED "PAUSE"** lights up to indicate that the Timer is PAUSED). To restart the Timer (and turn the enlarger lamp back on), press the **START** button otherwise, by pressing the **STOP** button a second time, the Timer will definitively and aborts the counting cycle, returning the Timer to the starting screen.



PROGRAMMING OF THE TIMES

Before entering the PROGRAMMING mode, choose the Time number you want program by pressing the **TIME SELECT** button one or more times: the Time number is indicated by one of the **8 red LEDs** lighting up.

There are 8 times that can be selected, so once you have reached the number eighth, pressing the button again restarts the sequence from the first LED and so on.



Once the desired Time to be programmed has been selected, press the **PROG** button to enter the PROGRAMMING mode.

NOTE - To enter in the PROGRAMMING MODE, the Timer must be ready (so NOT paused).

During programming the Time, ONLY one digit lights up on the display at a time (i.e. the one selected for entering the value to be programmed): the remaining digits on the display are "hidden" and their positions are indicated by **underscores lighting up**.



Select the POSITION and insert the VALUE

The **START** and **STOP** buttons have a double function: when entering the PROGRAMMING mode, these two buttons allow you to choose the position of the digit to program and the relative value to enter, as described below:

O Button ► (START) - Each press of the button selects a different position on the display (from left to right). In correspondence with the selected position, the digit in which the value to be programmed will be entered will be displayed. After the fourth position, pressing the button again restarts the sequence from the first position and so on.



lacktriangle Button lacktriangle (STOP) - Each press inserts a value from lacktriangle to the selected digit. Once the value lacktriangle has been reached, pressing the button again restarts from the value lacktriangle and so on.



To exit the PROGRAMMING mode, press the **PROG** button: in this way the time appearing on the display will be saved in the memory with the number indicated by the lighting up of one of the **8 red LEDs** (for example, if upon exiting PROGRAMMING mode the LED number 6 is on, the time just programmed will be saved in the memory as Time number 6).



PROGRAMMING THE "PEDAL" SOCKET

The **PEDAL** socket can be set with TWO different working modes:

- O FOCUS: turning the enlarger lamp ON and OFF without timing.
- O **START/STOP** the Timer: to start and stop the Timer without using the buttons.

To correctly activate the **FOCUS** function or the **START/STOP** function, only PEDALS or CONTACTS must be **N**ormally **O**pen type (**N.O.**).

To set one of the TWO operating modes of the PEDAL, press and hold down the **STOP** button for at least 2 seconds until the number \bigcirc or \bigcirc appears on the display, as specified in the following paragraphs.

NOTE - The operating mode of the PEDAL is memorized in the memory of the microcontroller: for this reason, after each Power-On, the Timer always operates with the last mode set by the user.

START/STOP function

If the display shows the digit \(\), the **PEDAL** socket is programmed as "Start/Stop" (**START/STOP** function). In this way the Timer can be started both by the **START** button or by the **PEDAL**.

To stop and abort the count, press the PEDAL a second time (otherwise, to put the Timer in PAUSE, press the **STOP** button).


NOTE - Even when the Timer has been started with the START button, it is also possible to stop it with the PEDAL.

NOTE - The use of the Timer with the PEDAL does not allow the PAUSE of the count: the pause can ONLY activate by the first pressure of the STOP button.

NOTE - If the count is PAUSED, to restore it, is necessary to press the START button because when the Timer PAUSED, the PEDAL socket is not active.




If the display shows the digit \Box , the **PEDAL** socket is programmed as "Focus" (**FOCUS** function): enlarger lamp ON and OFF by PEDAL, without timing.





When the PEDAL socket is programmed as **FOCUS**, each pressure of the pedal (or of any other actuator connected to the socket) turns on the enlarger lamp without timing.

When switching on the lamp with the FOCUS function, all the LEDs are off (except for the **LAMP LED**) and **4 dashes** (----) are shown on the display.


To turn off the enlarger lamp, press the PEDAL again (or press the **STOP** button) and the Timer will return to normal operating status.








CONNECTION DIAGRAM for Timer DR-841

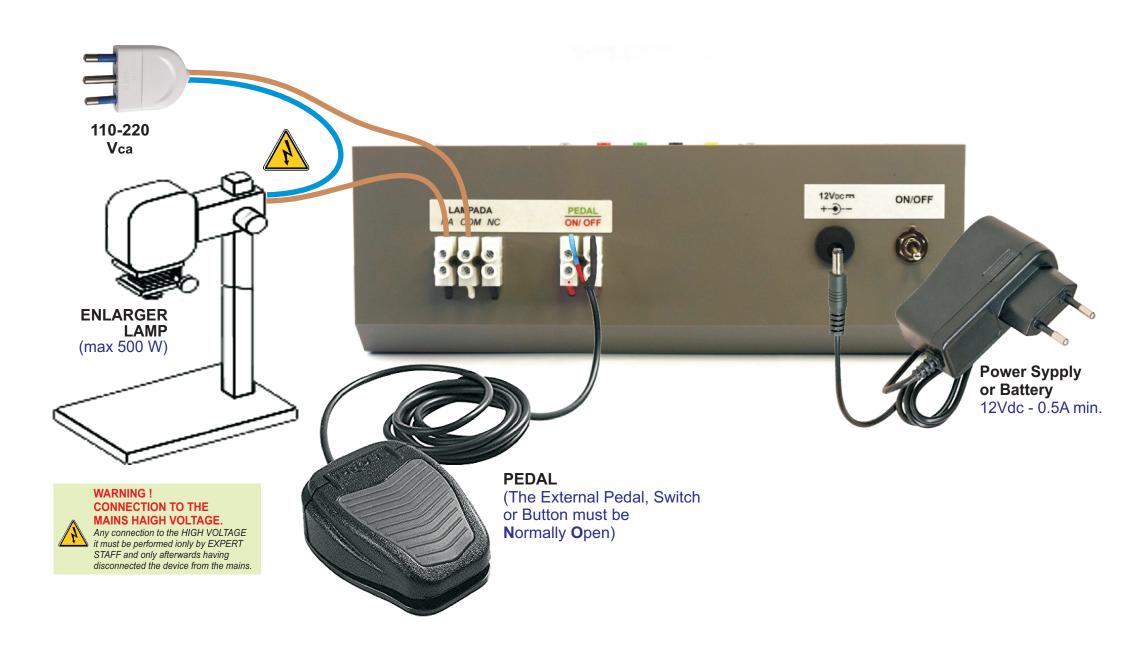

HOW TO CONNECT an EXTERNAL RELAY

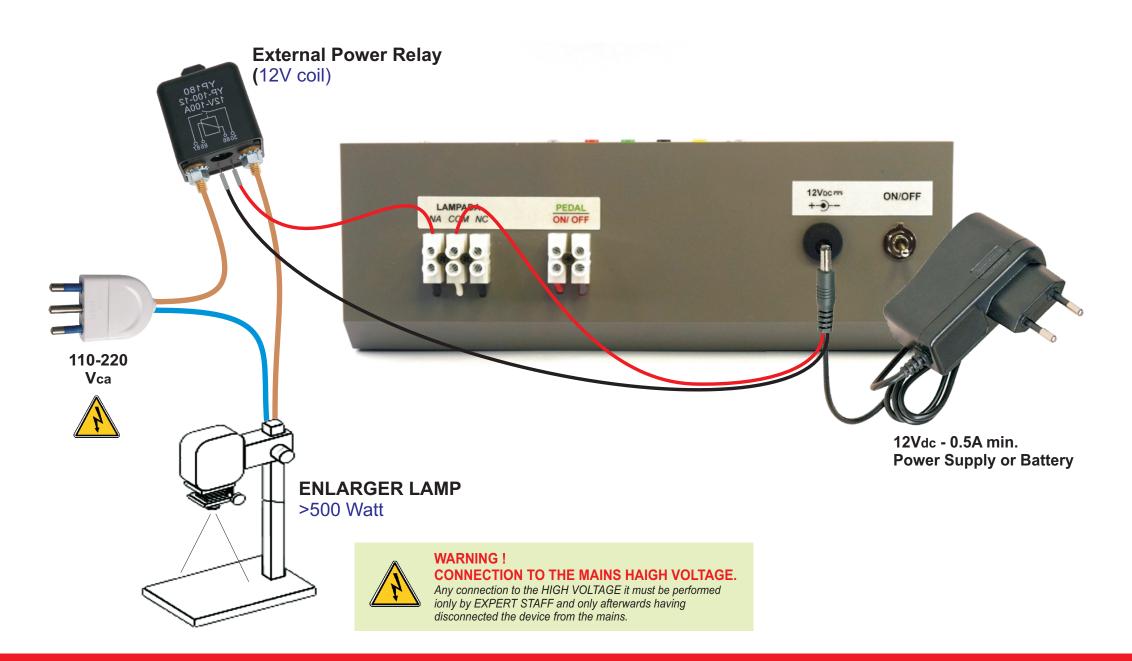

TYPICAL CONNECTION of LAMPS

